


PCM-3115

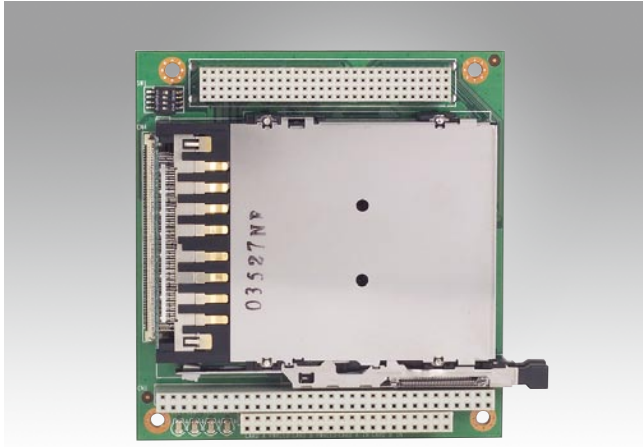

Features

- High-performance (PC/104-Plus)
- Low power consumption (Hardware Suspend)
- Compliant with PC Card 95/97/98, Card-32 (32 Bit), PCMCIA V2.1/JEIDA 4.2 (16 Bit)
- Accepts Type I/II/III PCMCIA cards
- Supports two PCMCIA slots (when Type III card used in Slot 2, Slot 1 will be occupied too)

Specifications

General	Bus Interface	PC/104-Plus (ISA/PCI)
	Chipset	Ricoh® CardBus Controller
	16-bit Legacy Mode	Yes (3E0/3E2 I/O port) support
	GPIO Support	Yes
	PCI way Legacy DMA	Yes
	Data Bus	32-Bit data bus (Compliant with PCI Bus Specification 2.1)
	PCI Interface	3.3 V interface (5 V tolerant)
Mechanical and Environmental	H/W Configuration	Plug & Play automatic detection & configuration
	S/W Driver	Supports Windows® NT 4.0, Windows® 95/98/2000
	Dimensions (L x W)	96 x 90 mm (3.8" x 3.5")
	Weight	0.094 kg (0.207 lb)
Power	Temperature	Operating: 0 ~ 60° C (32 ~ 140° F) Storage: -40 ~ 85° C (-40 ~ 185° F)
	Operating Humidity	0% ~ 90% relative humidity, non-condensing
	Power Supply Voltage	+5 V, ± 5 % tolerance on power supply
	Power Consumption	+5 V @ 70 mA (typical)

Ordering Information

P/N	Description
PCM-3115-00B1E	2-slot CardBus module

Packing List

P/N	Description	Quantity
-	Startup manual	x 1
-	CD-ROM (Manual, driver, utility)	x 1
PCM-3115	2-slot CardBus Module	x 1

